



# Sauledda

TECHNICAL

## IMOLA

---

## IMOLA FR



# IMOLA / IMOLA FR



**Producción respetuosa**  
Production that respects  
the environment



**Anti-UVI**  
Anti-UVI



**Climático**  
Climatic



**Máxima resistencia**  
Maximum resistance



**Anti-manchas**  
Non-stain



**Estabilidad dimensional**  
Dimensional stability





**Impremeable**  
Waterproof



**Doble cara, tejido protegido**  
Double sided, protected fabric



**Fácil mantenimiento**  
Easy to maintain




**Snow** Ral 9016

**67012** 250 cm



**FR\*** **67024** 250 cm 

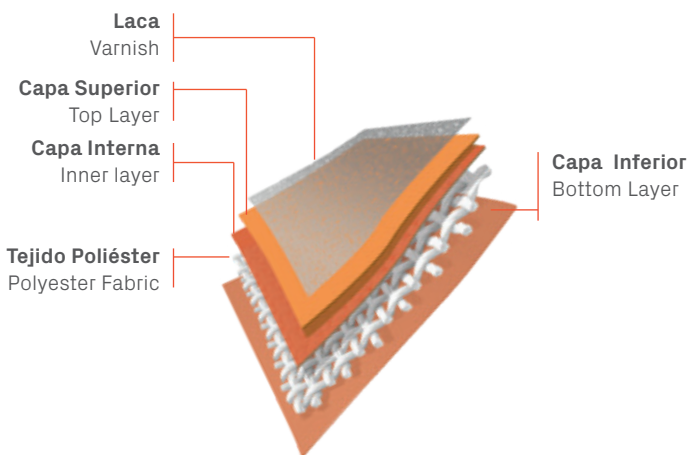

**Amarillo** | Muestra de calidad Quality sample

## Características técnicas

Aplicaciones



| RESISTENCIA TRACCIÓN<br>TEN SILE STRENGTH |              | RESISTENCIA DESGARRE<br>TEAR STRENGTH |            | ANCHO<br>WIDTH | COMPOSICIÓN<br>COMPOSITION                        | PESO<br>WEIGHT                               |
|-------------------------------------------|--------------|---------------------------------------|------------|----------------|---------------------------------------------------|----------------------------------------------|
| Urdimbre Warp                             | Trama Weft   | Urdimbre Warp                         | Trama Weft | 250 cm         | Poliéster AT 1100 dtex<br>Polyester high tenacity | 630 gr / m <sup>2</sup><br>UNE EN ISO 2286.2 |
| 270 daN/5 cm                              | 250 daN/5 cm | 35 daN                                | 29 daN     |                |                                                   |                                              |
| UNE EN ISO 1421                           |              | UNE EN ISO 1421                       |            |                |                                                   |                                              |

Sujeto a cambios en relación con las mejoras técnicas. Los valores indicados sin niveles de tolerancia son valores nominales con un rango de tolerancia de  $\pm 5\%$ . Todos los datos presentados aquí se ofrecen, según nuestro leal saber y entender, con fines orientativos y no son legalmente vinculantes. V0425

Subject to change with respect to technical improvements. The values stated without tolerance levels are nominal values with a tolerance range of  $\pm 5\%$ . All data presented here are to the best of our knowledge and belief for guidance purposes and are not legally binding. V0425



Sauleda Imola es un tejido técnico con un doble recubrimiento que le hace tener una gran resistencia e impermeabilidad. Lacado a dos caras, cuenta con 12 colores lisos y elegantes ideales para adaptarse a cualquier entorno.


Sauleda Imola es un producto muy versátil de múltiples aplicaciones cuyo uso mayoritario es el exterior. Todo tipo de toldos, camping, carpas, transporte son algunas de sus principales aplicaciones.

Es ligero, versátil, adaptable... Son características que lo hacen indispensable en múltiples aplicaciones.


Sauleda Imola is a technical fabric with double coverage which allows for great resistance to weather and is water-proof. Lacquered on two sides, this fabric is offered in more than 12 plain and elegant colors. Perfect for any type of environment. Sauleda Imola is a very versatile product with multiple applications much of which are for outdoor use.

There are all types of applications for these awnings which include, camping, tents, and transport.

It is light, versatile and adaptable... These are the characteristics that make it indispensable in multiple applications.



**Hueso** Ral 9010  
**67004** 250 cm  
**FR\*** **67020** 250 cm



**Marfil** Ral 1013  
**67010** 250 cm



**Champagne** Ral 1015  
**67011** 250 cm



**Amarillo** Ral 1003  
**67003** 250 cm



**Rojo** Ral 3002  
**67008** 250 cm



**Verde** Ral 6026  
**67007** 250 cm



**Mar** Ral 5015  
**67006** 250 cm



**Crepusculo** Ral 5010  
**67005** 250 cm  
**FR\*** **67023** 250 cm



**Perla** Ral 7035  
**67000** 250 cm



**Gris Claro** Ral 7038  
**67002** 250 cm  
**FR\*** **67021** 250 cm



**Antracita** Ral 7016  
**67001** 250 cm  
**FR\*** **67022** 250 cm



**Negro** Ral 9005  
**67009** 250 cm



Applications

Technical Characteristics

| ACABADO<br>FINISH                   | ADHERENCIA<br>ADHESION         | LONGITUD DE LAS PIEZAS<br>ROLL LENGTH | ESPESOR<br>THICKNESS | TEMPERATURA<br>TEMPERATURE | SOLIDEZ A LA LUZ<br>LIGHT FASTNESS |
|-------------------------------------|--------------------------------|---------------------------------------|----------------------|----------------------------|------------------------------------|
| Lacado 2 caras<br>Lacquered 2 faces | 10 daN/5 cm<br>UNE EN ISO 2411 | 260 ml<br>65 ml                       | 0,52 mm              | -30°C+70°C                 | 6-8<br>UNE EN ISO 105 B02          |
| <b>IGNÍFUGO *</b><br>FIRE RETARDANT | T2<br>UNE EN 15619             |                                       |                      |                            |                                    |

**Sauleda**



# Sauleda

@sauledatextiles  
www.sauleda.com  
sauleda@sauleda.com  
+34 933 397 150

